


REVISIONS				
ECN	REV.	DESCRIPTION	DATE	APPROVED

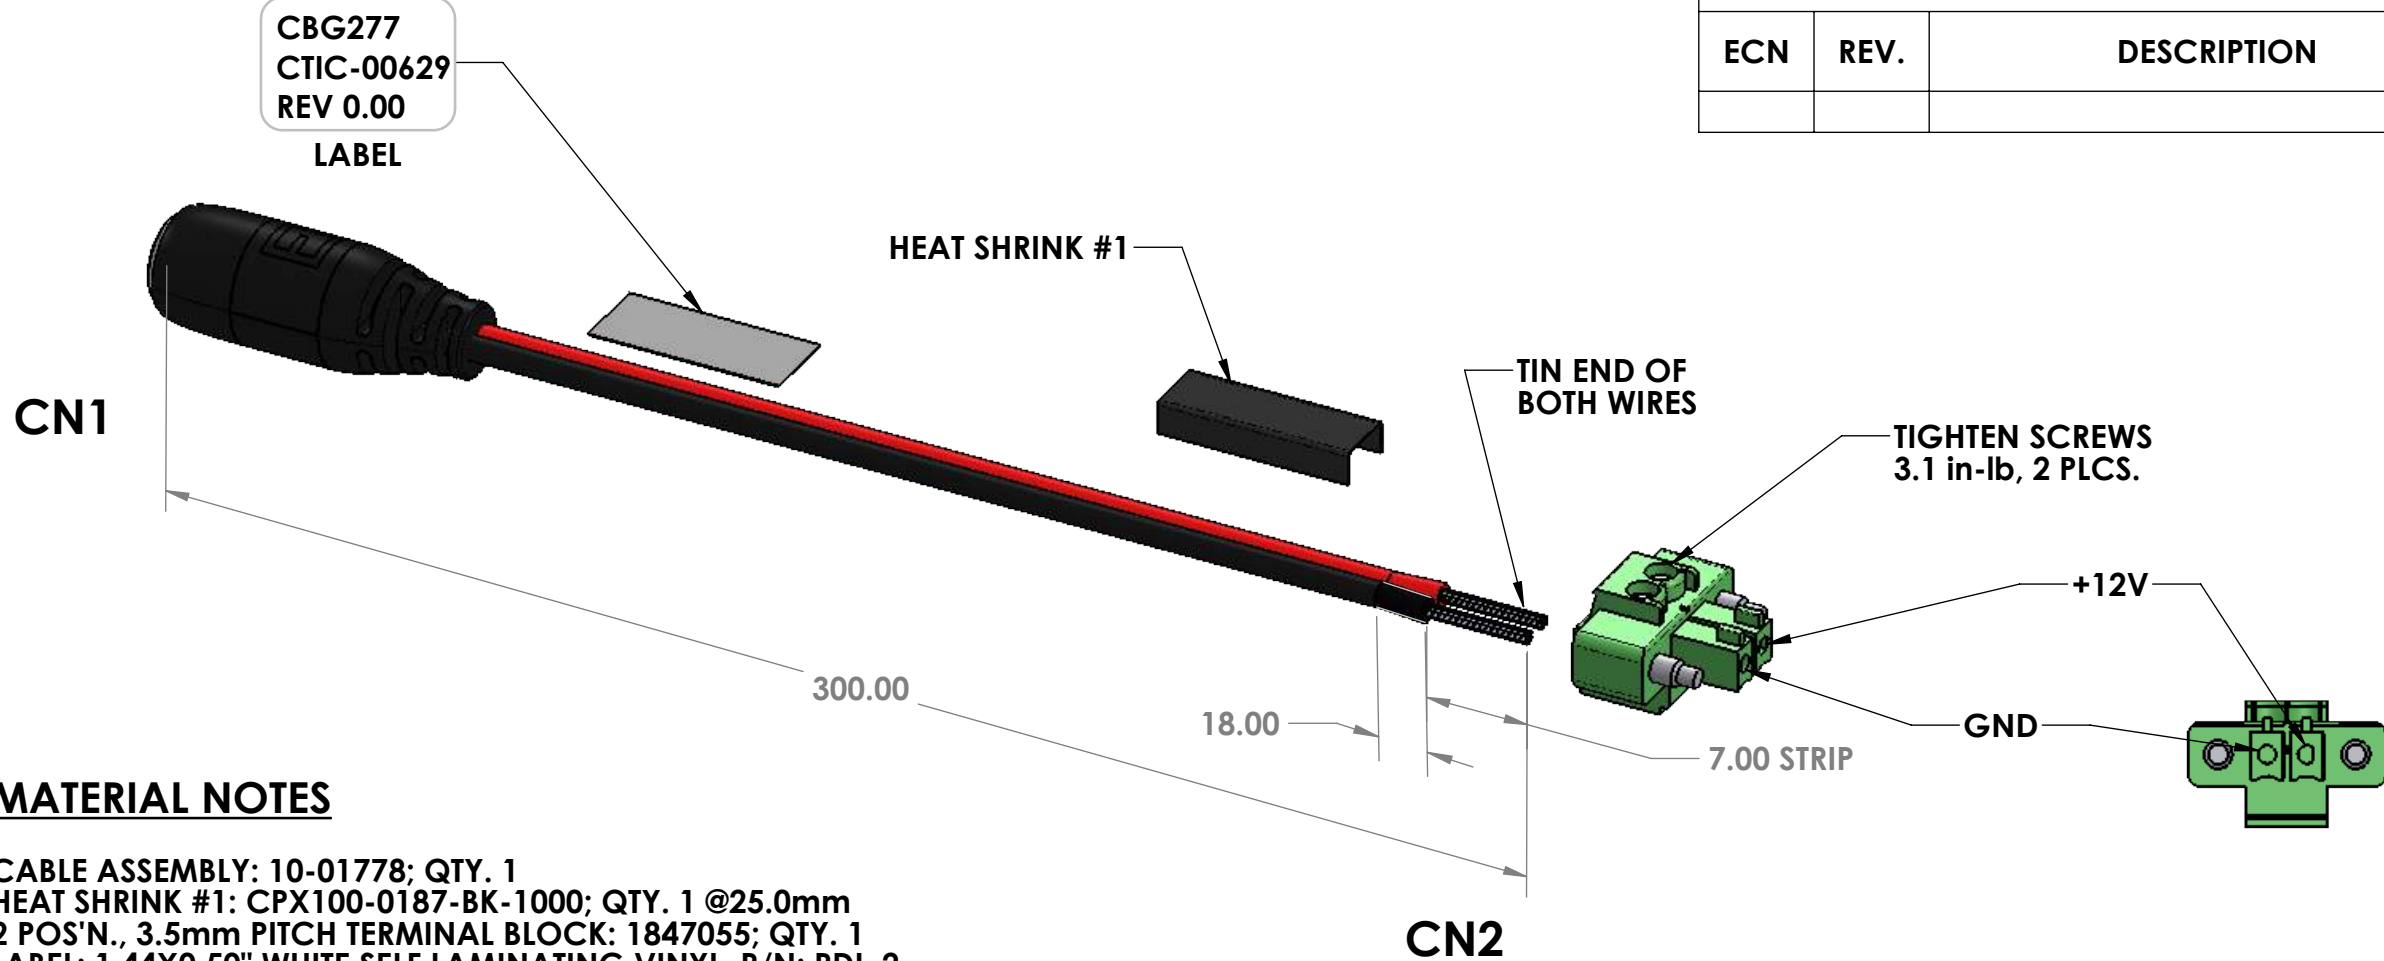

MATERIAL NOTES

CABLE ASSEMBLY: 10-01778; QTY. 1
 HEAT SHRINK #1: CPX100-0187-BK-1000; QTY. 1 @25.0mm
 2 POS'N., 3.5mm PITCH TERMINAL BLOCK: 1847055; QTY. 1
 LABEL: 1.44X0.50" WHITE SELF LAMINATING VINYL, P/N: PDL-2

ASSEMBLY INSTRUCTIONS

1. CUT CABLE ASSEMBLY TO LENGTH AT 300.00mm.
2. CUT HEAT SHRINK #1 AT 25.0mm AND INSERT THROUGH LEADS.
3. SEPARATE RED AND BLACK LEADS TO 25.0mm.
4. STRIP EACH LEAD TO 7.00mm AND TIN EACH.
5. POSITION HEAT SHRINK #1 STARTING WHERE TWO LEADS ARE SEPARATED, SECURE IN PLACE.
6. INSERT LEAD ENDS AS SHOWN INTO TERMINAL BLOCK. TIGHTEN SCREWS TO 3.1 in-lb
7. PRINT LABEL WITH INFORMATION AS SPECIFIED AND AFFIX TO THE WIRES AS SHOWN.

IMAGE MAY NOT BE TO SCALE

****PRINT IN COLOUR****

PINOUT CHART

CN1	SIGNAL	COLOUR	CN2
	POWER	RED	+12V
	GROUND	BLACK	GND

THIRD ANGLE	DRAWN D.P.	DATE 10/10/2017
	CHECKED	DATE
	ENG APPR.	DATE
	MFG APPR.	DATE
	Q.A.	DATE

Connect Tech Inc.
 Embedded Computing Experts
 42 ARROW ROAD, GUELPH, ON, CANADA, N1K 1S6

TITLE:
**POWER SUPPLY UNIT
 ASSEMBLY, BARREL-2
 POS TERMINAL BLOCK**

WHERE USED
PRF1222
 THIS DRAWING AND SPECIFICATION SHOWN IS CONFIDENTIAL AND IS THE PROPERTY OF CONNECT TECH INCORPORATED. IT IS NOT TO BE REPRODUCED OR COPIED OR USED AS A BASIS TO MANUFACTURE ANYTHING SHOWN WITHOUT PRIOR WRITTEN PERMISSION OF CONNECT TECH INCORPORATED. ALL RIGHTS TO DESIGN OR INVENTION ARE RESERVED.

DO NOT SCALE DRAWING	SIZE B	PART NO. CBG277	REV 0.00
SHEET 1 OF 2	SCALE: 3:2	DOCUMENT NO. CTIC-00629	


TESTING PROCEDURE

VOLTAGE PRE-TEST:

1. PRIOR TO TESTING THIS ASSEMBLY IN A SYSTEM TEST, USING A MULTI-METER PLACE THE RED PROBE TO RED LEAD AND THE BLACK PROBE TO BLACK LEAD - APPLY POWER TO THE CABLE USING POWER SUPPLY P/N: SD165-12-U-P5 TO CHECK THE VOLTAGE WHICH SHOULD BE BETWEEN 10.8V TO 13.2V.
2. IF OK, PROCEED TO SYSTEM POWER TEST.

SYSTEM POWER TEST:

1. AT THE ASG TEST STATION INSTALL THE CABLE ONTO THE ASG001 (ASTRO) CARRIER WITH XBG201 BREAKOUT (POWER CONNECTOR LOCATED ON XBG201).
2. PLUG THE CABLE INTO THE CONNECTOR AS SHOWN IN THE FIGURE. CHECK TO ENSURE THE CABLE AND CONNECTOR POLARITY IS CORRECT. *DO NOT APPLY POWER WHEN THE POLARITY IS INCORRECT!*
3. APPLY POWER TO THE SYSTEM USING POWER SUPPLY P/N: SD165-12-U-P5.
4. USING A MULTI-METER PLACE THE RED PROBE TO THE '+' (AS IDENTIFIED ON THE PCB SILK) AND THE BLACK PROBE TO THE '-' (AS IDENTIFIED ON THE PCB SILK) AS SHOWN IN THE FIGURE. THE VOLTAGE SHOULD BE 10.8V TO 13.2V.
5. IF THIS VOLTAGE VALUE IS NOT ACHIEVED, THE CABLE FAILED.

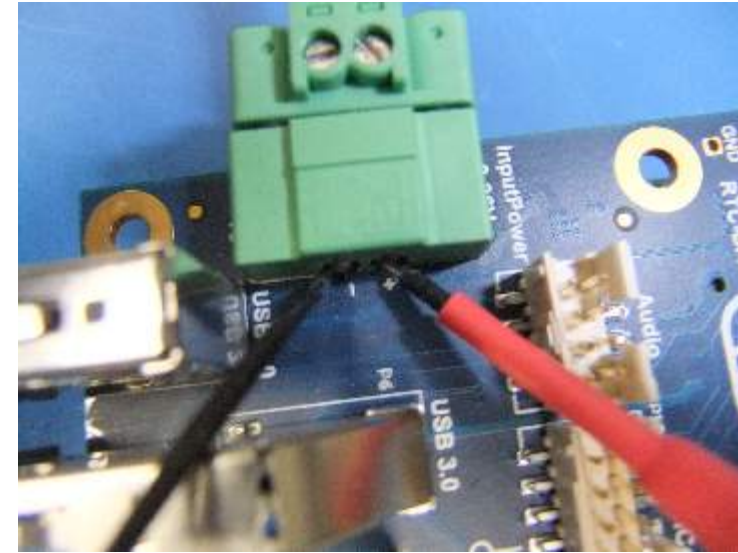

CTP **Connect Tech Inc.**
Embedded Computing Experts
 42 ARROW ROAD, GUELPH, ON, CANADA, N1K 1S6

TITLE:
**POWER SUPPLY UNIT
 ASSEMBLY, BARREL-2
 POS TERMINAL BLOCK**

DO NOT SCALE DRAWING		SIZE	PART NO.	REV
SHEET 2 OF 2	SCALE: 7:8	B	CBG277	0.00
			DOCUMENT NO. CTIC-00629	