




Cogswell is the carrier board designed specifically for use in Gigabit Ethernet Vision applications.



Cogswell's design includes a total of 5 Gigabit Ethernet Ports. Four of these ports can be used for IEEE 802.3af (PoE) 15.4W power sourcing or two of these ports can be used for IEEE 802.3at (PoE+) 25.5W power sourcing.

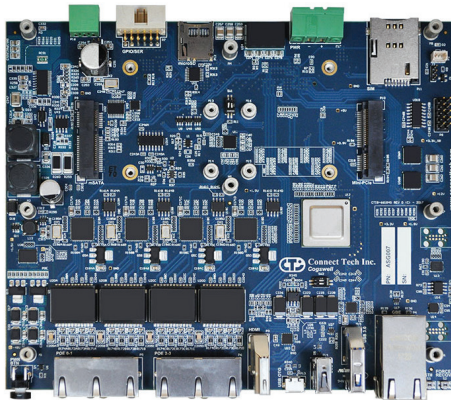

Cogswell also enables HDMI Video, USB 3.0, USB 2.0, USB OTG, Mini-PCIe/mSATA expansion, and two RS-232 Serial Ports.

FEATURES

- ✓ 5 x Gigabit Ethernet Channels 4 x PoE, 2 x PoE+ PSE Gigabit Ports
- ✓ Only a single +12V input required; No external 48V PoE power required
- ✓ 1 x USB 3.0, 1x USB 2.0, 1x USB OTG, 2x RS-232, 1x miniPCIe, 1x mSATA
- ✓ Extended Temperature Range: -20°C to +80°C

SPECIFICATIONS

Compatibility	NVIDIA Jetson TX2 or TX2i	Dimensions	178mm x 147.5mm (7.007874" x 5.807087") Designed to fit into OEM enclosure
GPU	NVIDIA Pascal™, 256 CUDA cores (Up to 1.3 GHz)	CPU	HMP Dual Denver 2/2MB L2 + Quad ARM® A57/2MB L2 (Up to 2 GHz)
Networking	5x Gigabit Ethernet Ports <ul style="list-style-type: none"> • 4x IEEE 802.3af (POE) 15.4W PSE Gigabit Ethernet Ports OR • 2x IEEE 802.3at (POE+) 25.5W PSE Gigabit Ethernet Ports 	USB	1 x USB 3.0 Port (Type-A); 1 x USB OTG (Micro-AB); 1 x USB 2.0 (Type-A); 1 x USB 2.0 to miniPCIe Slot
Display Output	1x HDMI 1.4a (Type-A vert RA) (Supports up to HDMI 2.0 UHD 4K [2160p] at 60Hz)	Storage	1 x mSATA Full Sized Slot 1 x microSD Card Slot
UART	2 x RS-232	I2C	I2C Channel 1 @ 3.3V IO
CAN	1 x CAN 2.0b Port	GPIO	4 bits of 3.3V (level shifted GPIO)
User Expansion	1 x miniPCIe Slot with PCIe & USB	LEDs	GbE LEDs, RESET#_OUT, PSU PGOOD
Input Power	+12 DC Input Only No external 48V is required, carrier creates its own PoE power	Buttons	Power, Reset, Recovery
Operating Temperature¹	-40°C to +85°C (-40°F to +185°F)		

[1] The Jetson TX2 Modules are rated for -25°C to +80°C (measured at thermal heat plate)



Specifications subject to change without notice. ©2021 Connect Tech Inc. All trademarks are property of their respective holder. CTIX-00468(0.06) - 2021-07-19